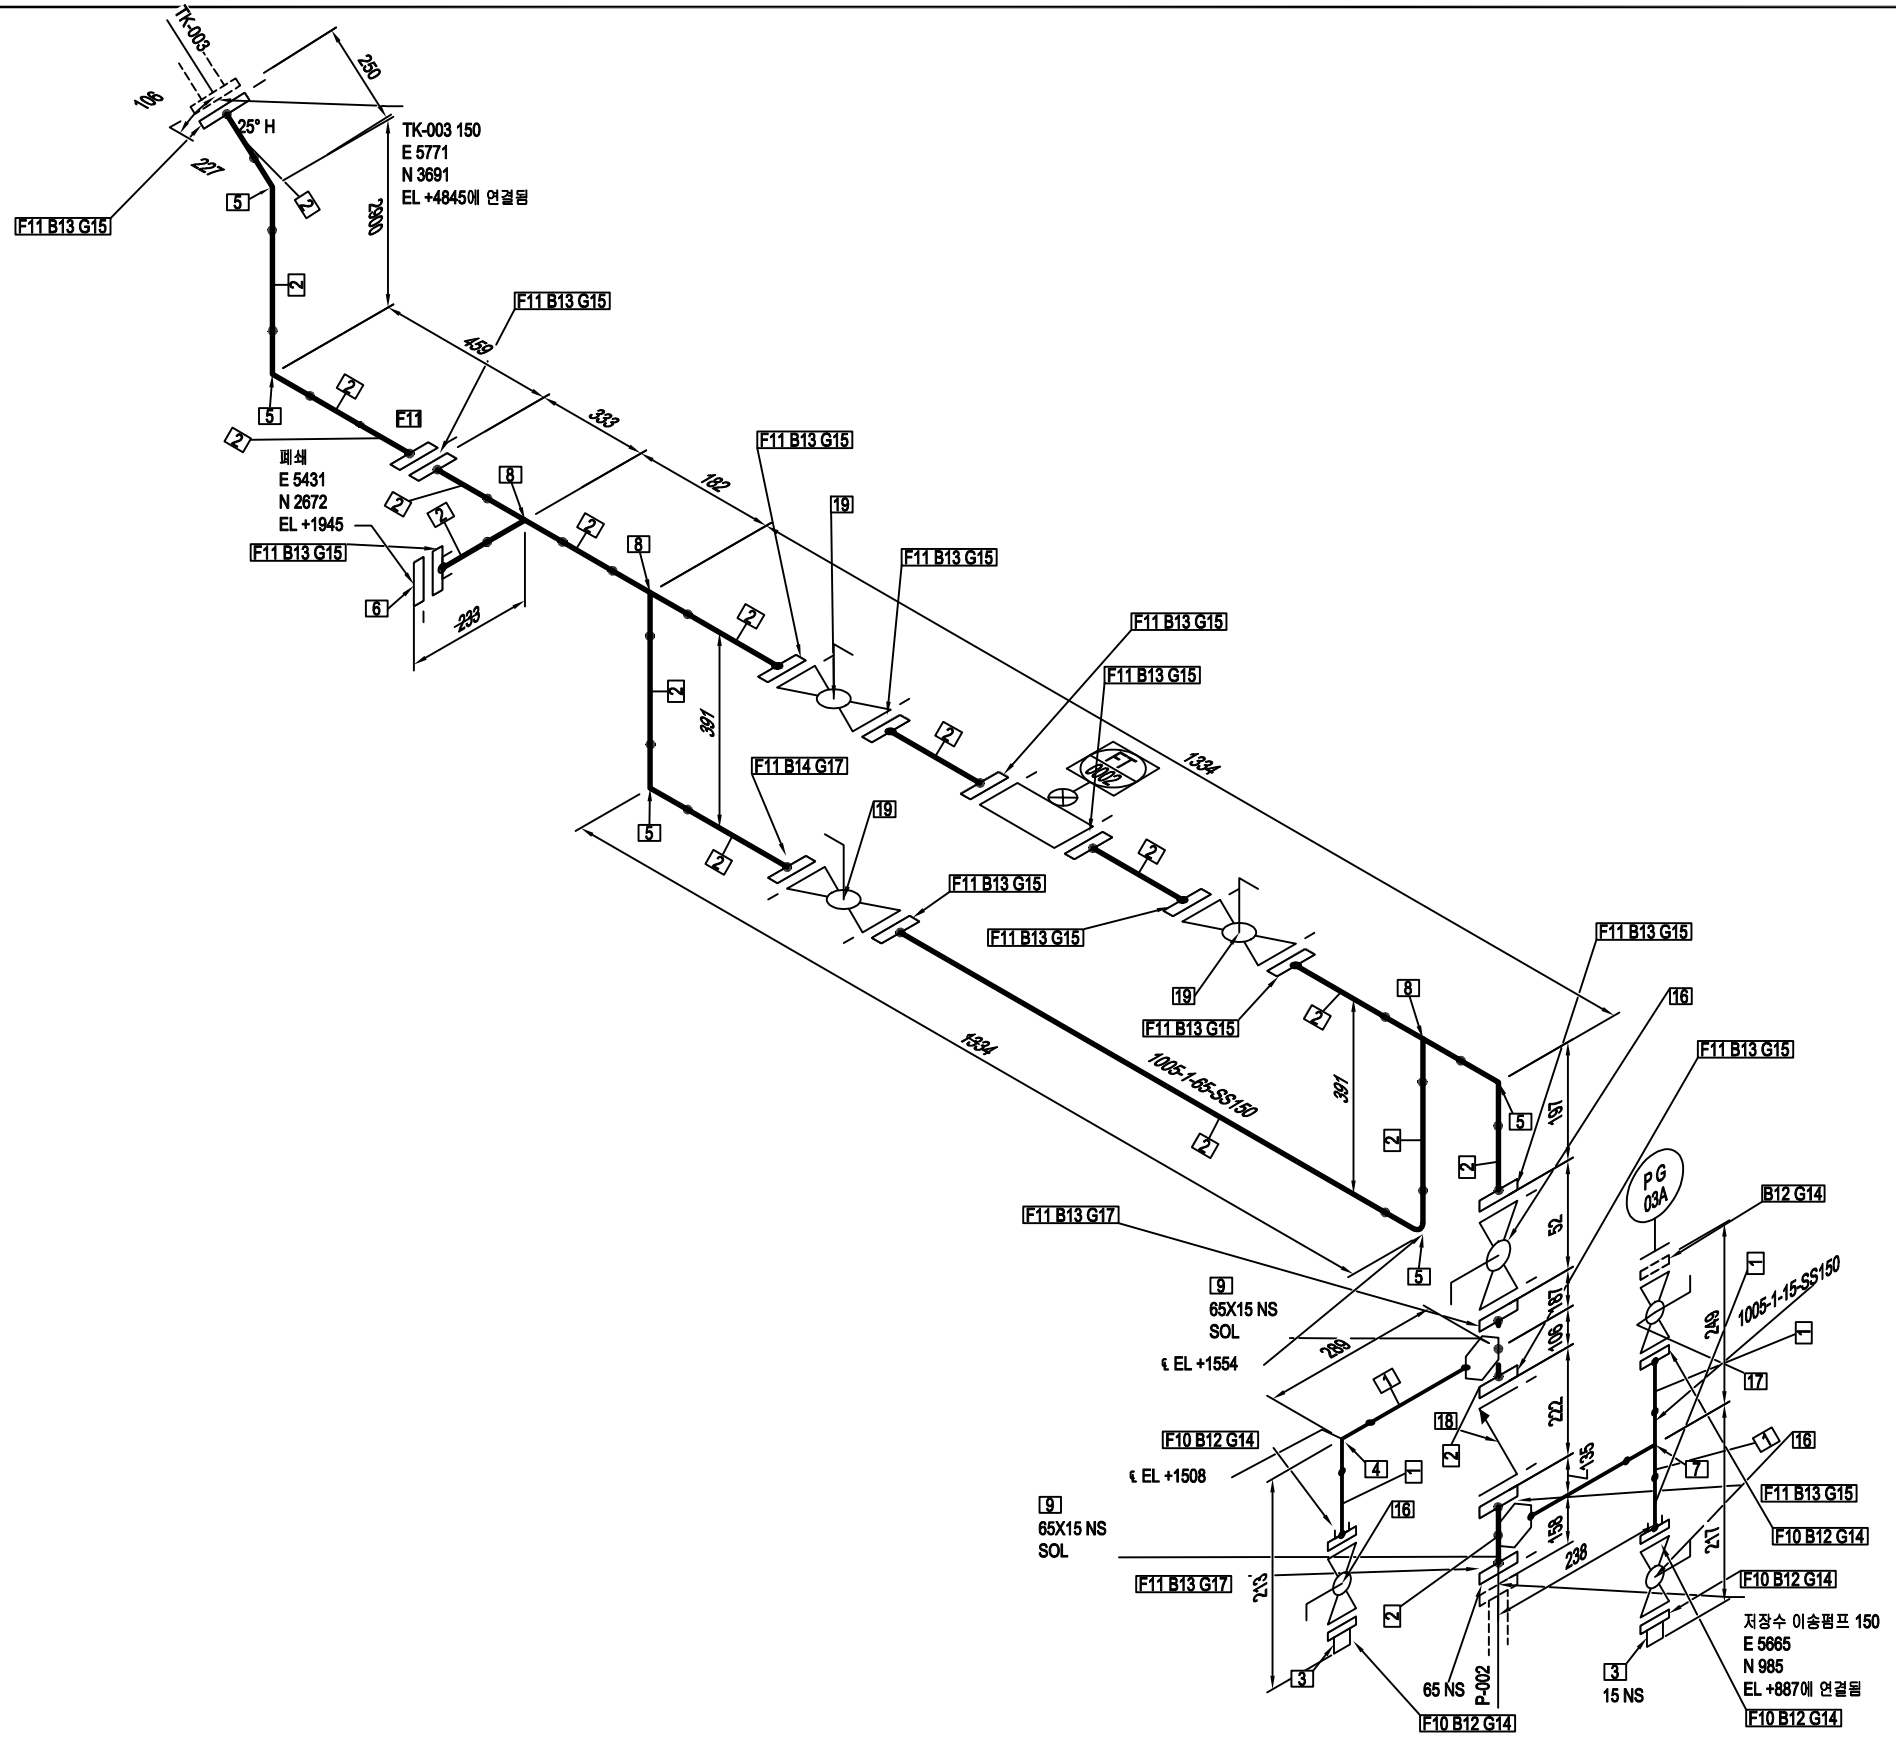

BILL OF MATERIALS

ID	QTY	ND	DESCRIPTION
			PIPE
1	0.8M	15	PIPE, ERW, STS304TP
2	6.3M	65	PIPE, ERW, STS304TP
			FITTINGS
3	2	15	PLUG, SW X PT, STS304, KSB1531
4	1	15	ELL 90, BW, STS304TP, KSB1531
5	5	65	ELL 90, BW, STS304TP, KSB1531
6	1	65	BLIND FLANGE, KS 10K, SO RF, STS304, KSB1503
7	1	15	TEE, BW, STS304TP, KSB1531
8	3	65	TEE, BW, STS304TP, KSB1531
			OLET
9	2	65X15	NIPPLE, STS304, KSB1531
			FLANGE
10	5	15	FLANGE, KS 10K, SO RF, STS304, KSB1503
11	17	65	FLANGE, KS 10K, SO RF, STS304, KSB1503
			조임쇠
12	24	M12X60L	Stud Bolt W/2 Heavy Hex Nuts, STS304B
13	64	M16X90L	Stud Bolt W/2 Heavy Hex Nuts, STS304B
14	6	15	GASKET, Non-Asbestos, KS 10K
15	16	65	GASKET, Non-Asbestos, KS 10K
			밸브
16	3	15	BALL VALVE, 304SS, SW X PT
17	1	15	BALL VALVE, KS 10K, RF, KSB2308, STS304
18	1	65	CHECK VALVE, KS 10K, RF, STS304
19	3	65	BALL VALVE, KS 10K, RF, KSB2308, STS304

REV.	DESCRIPTION	DATE	DRAWN	CHKD	APPD
A	FOR APPROVAL	2022.05.27	LYE	KKC	KSH

SERVICE	
PIPE SPEC	STS304
OPER. / DESIGN PRESSURE	-
OPER. / DESIGN TEMPERATURE	-
P&ID DWG	-
INSULATION SPEC./ THK	-
NDT / PWHT / PAINTING	NA / NA / NA

PROJECT NAME:
대구시 환경자원사업소 ICT 기반 악취방지시스템 구축 PROJECT

Colorful DAEGU 대구광역시

TAESUNG ENVIRONMENT INSTITUTE

DRAWING NUMBER: 65A-1005

LINE NO: 65A-1005 | AREA: | UNIT: | TYPE:

JOB NUMBER: | SCALE: N.T.S. | SHEET: 1 OF 1 | REV. 0